chainflex® CASE

ship'n store by igus® ...

www.igus.eu/cf-case

chainflex®
cable works

Keep things in order with chainflex® CASE S now even smaller

New smaller size of the chainflex® CASE M, especially for small cables, offering the possibility of compact storage

Tech up

- 50% less space for small cables
- 100% of the advantages of the large chainflex® CASE M
- Smaller size means easy handling, even on the road

Cost down

- Compatible with the larger chainflex® CASE M (stackable)
- Use storage space more effectively: where one CASE used to fit, two fit now
- Lower price for shorter cable lengths compared to the chainflex® CASE M with a maximum filling of 200m

Proof

- Already in use by numerous customers

Sustainability

- Reduced material usage
- Manufactured from reusable materials

chainflex® CASE application example from the field: BSH Hausgeräte GmbH
"The maintenance staff at the BSH plant in Bad Neustadt an der Saale have implemented a real "out of the box" solution. Electrical cables no longer arrive by hank or cable drum, but in the "chainflex CASE" shipping and storage solution. This saves costs, space and waste."

Four times easier ... more than 850 cables from stock ...

1 Easy delivery

2 Easy unreeling

3 Easy storage

4 Easy re-ordering

chainflex® CASE - simply deliver, store, unreel and re-order

Save 84% on shipping costs ... easy to process ... re-order 60% faster ... stackable to save space ... available in 1-2 days ...

The chainflex® CASE is a cardboard box that allows cable drum shipping without a pallet. This means that the goods can be sent by a parcel carrier. The chainflex® CASE is not only used for transport, but also works as a storage system for cable drums. The cable can be easily unreeled directly from the box. Thanks to its stackability, you can set up flexible storage facilities. The QR code on the shipping box makes online re-ordering easy. All in all, this system helps you save shipping, process and storage costs.

chainflex® CASE allows cable drums to be shipped in a cardboard box via parcel carriers. Very simple and you can save up to 84% shipping cost compared to standard shipping on a pallet by a freight forwarder.

Remove expensive storage systems for cable drums. Unreel the cable immediately from the chainflex® CASE. Carrying handles and stackability allow for individual storage spaces.

This system makes storage mobile and can be used directly on construction sites, for instance. Expensive special shelving is not required; instead, it can be stored in standard shelving systems.

With the QR Code on every chainflex® CASE, you can re-order your cable online in a few seconds. Simply use your smartphone's scanner.

Online ordering made easy

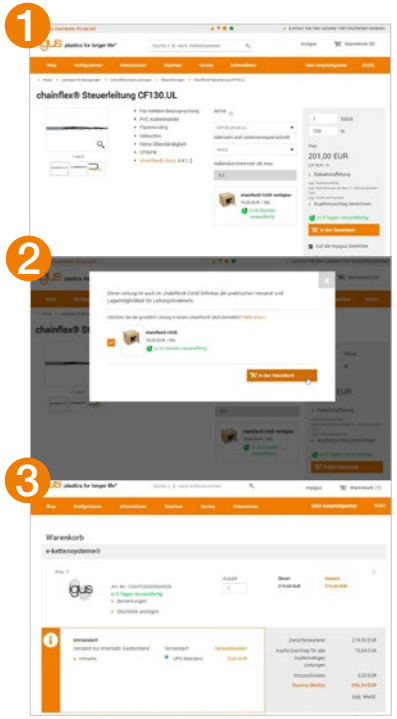

1 Selecting the desired chainflex® cable in the online shop ...

2 With the corresponding cables, the CASE is automatically displayed as an option and can be added with just one click ...

3 The combination of cable/CASE is shown in the shopping cart and can be ordered ...

Two sizes ... can also be ordered separately ...

Just add the desired CASE to your order

chainflex® CASE
MAT0012614.20

chainflex® CASE S
MAT0012678.20

Control cables in the chainflex® CASE

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
Control cables			
CF880.05.02	2x0.5	200	200
CF880.05.03	3G0.5	200	200
CF880.05.04	4G0.5	200	200
CF880.05.05	5G0.5	200	200
CF880.05.07	7G0.5	200	150
CF880.05.12	12G0.5	150	100
CF880.05.18	18G0.5	100	100
CF880.07.02	2x0.75	200	200
CF880.07.03	3G0.75	200	200
CF880.07.04	4G0.75	200	200
CF880.07.05	5G0.75	200	150
CF880.07.07	7G0.75	200	150
CF880.07.12	12G0.75	150	100
CF880.07.18	18G0.75	100	-
CF880.10.02	2x1.0	200	200
CF880.10.03	3G1.0	200	200
CF880.10.04	4G1.0	200	150
CF880.10.05	5G1.0	200	150
CF880.10.07	7G1.0	150	100
CF880.10.12	12G1.0	100	-
CF880.15.02	2x1.5	200	200
CF880.15.03	3G1.5	200	150
CF880.15.04	4G1.5	200	150
CF880.15.05	5G1.5	150	100
CF880.15.07	7G1.5	100	100
CF880.25.03	3G2.5	150	100
CF880.25.04	4G2.5	150	100
CF880.25.05	5G2.5	100	100
CF881.05.03	(3G0.5)C	200	200
CF881.05.04	(4G0.5)C	200	200
CF881.05.05	(5G0.5)C	200	150
CF881.05.07	(7G0.5)C	200	150
CF881.05.12	(12G0.5)C	150	100
CF881.05.18	(18G0.5)C	100	-
CF881.07.02	(2x0.75)C	200	200
CF881.07.03	(3G0.75)C	200	150
CF881.07.04	(4G0.75)C	200	150
CF881.07.05	(5G0.75)C	200	150
CF881.07.07	(7G0.75)C	150	100
CF881.07.12	(12G0.75)C	100	-
CF881.10.02	(2x1.0)C	200	200
CF881.10.03	(3G1.0)C	200	150

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF881.10.04	(4G1.0)C	200	150
CF881.10.05	(5G1.0)C	200	150
CF881.10.07	(7G1.0)C	150	100
CF881.10.12	(12G1.0)C	100	-
CF881.15.02	(2x1.5)C	200	150
CF881.15.03	(3G1.5)C	200	150
CF881.15.04	(4G1.5)C	150	100
CF881.15.05	(5G1.5)C	100	100
CF881.15.07	(7G1.5)C	100	-
CF881.25.04	(4G2.5)C	100	100
CF881.25.05	(5G2.5)C	100	-
CF130.02.03.UL	3x0.25	200	200
CF130.02.04.UL	4x0.25	200	200
CF130.02.06.UL	6x0.25	200	200
CF130.02.07.UL	7x0.25	200	200
CF130.02.12.UL	12x0.25	200	100
CF130.02.18.UL	18x0.25	150	100
CF130.02.20.UL	20x0.25	150	-
CF130.02.25.UL	25x0.25	100	-
CF130.02.30.UL	30x0.25	100	-
CF130.03.02.UL	2x0.34	200	200
CF130.03.05.UL	5x0.34	200	200
CF130.05.02.UL	2x0.5	200	200
CF130.05.03.UL	3G0.5	200	200
CF130.05.04.UL	4G0.5	200	200
CF130.05.05.UL	5G0.5	200	200
CF130.05.07.UL	7G0.5	200	150
CF130.05.12.UL	12G0.5	150	100
CF130.05.18.UL	18G0.5	100	-
CF130.07.02.UL	2x0.75	200	200
CF130.07.03.UL	3G0.75	200	200
CF130.07.04.UL	4G0.75	200	200
CF130.07.05.UL	5G0.75	200	150
CF130.07.07.UL	7G0.75	200	150
CF130.07.12.UL	12G0.75	100	-
CF130.10.02.UL	2x1.0	200	200
CF130.10.03.UL	3G1.0	200	200
CF130.10.04.UL	4G1.0	200	150
CF130.10.05.UL	5G1.0	200	150
CF130.10.07.UL	7G1.0	200	100
CF130.10.12.UL	12G1.0	100	-
CF130.15.02.UL	2x1.5	200	200

Control cables in the chainflex® CASE

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF130.15.03.UL	3G1.5	200	150
CF130.15.04.UL	4G1.5	200	150
CF130.15.05.UL	5G1.5	200	100
CF130.15.07.UL	7G1.5	150	-
CF130.15.12.UL	12G1.5	100	-
CF130.25.03.UL	3G2.5	200	100
CF130.25.04.UL	4G2.5	150	100
CF130.25.07.UL	7G2.5	100	-
CF130.40.03.UL	3G4.0	100	100
CF140.02.12.UL	(12x0.25)C	150	-
CF140.03.05.UL	(5x0.34)C	200	150
CF140.05.03.UL	(3G0.5)C	200	150
CF140.05.05.UL	(5G0.5)C	200	150
CF140.07.03.UL	(3G0.75)C	200	150
CF140.07.04.UL	(4G0.75)C	200	100
CF140.07.05.UL	(5G0.75)C	200	100
CF140.07.07.UL	(7G0.75)C	150	100
CF140.07.12.UL	(12G0.75)C	100	-
CF140.10.02.UL	(2x1.0)C	200	150
CF140.10.03.UL	(3G1.0)C	200	100
CF140.10.04.UL	(4G1.0)C	200	100
CF140.10.05.UL	(5G1.0)C	150	100
CF140.10.07.UL	(7G1.0)C	150	-
CF140.15.03.UL	(3G1.5)C	200	100
CF140.15.04.UL	(4G1.5)C	150	100
CF140.15.05.UL	(5G1.5)C	150	100
CF140.15.07.UL	(7G1.5)C	100	-
CF140.25.03.UL	(3G2.5)C	100	-
CF140.25.04.UL	(4G2.5)C	100	-
CF150.UL.10.03	3G1.0	200	150
CF150.UL.10.04	4G1.0	200	100
CF150.UL.10.05	5G1.0	200	100
CF150.UL.10.07	7G1.0	150	-
CF150.UL.15.03	3G1.5	200	100
CF150.UL.15.04	4G1.5	200	100
CF150.UL.15.05	5G1.5	150	100
CF150.UL.15.07	7G1.5	100	-
CF150.UL.25.03	3G2.5	150	100
CF150.UL.25.04	4G2.5	150	100
CF150.UL.25.05	5G2.5	100	-
CF150.UL.25.07	7G2.5	100	-
CF160.UL.10.03	(3G1.0)C	150	100

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF160.UL.10.04	(4G1.0)C	150	100
CF160.UL.10.05	(5G1.0)C	100	-
CF160.UL.10.07	(7G1.0)C	100	-
CF160.UL.15.03	(3G1.5)C	150	100
CF160.UL.15.04	(4G1.5)C	100	-
CF160.UL.15.05	(5G1.5)C	100	-
CF160.UL.25.03	(3G2.5)C	100	-
CF160.UL.25.04	(4G2.5)C	100	-
CF160.UL.25.05	(5G2.5)C	100	-
CF5.03.18	18x0.34	100	-
CF5.05.02	2x0.5	200	200
CF5.05.03	3G0.5	200	200
CF5.05.04	4G0.5	200	200
CF5.05.05	5G0.5	200	150
CF5.05.07	7G0.5	200	150
CF5.05.12	12G0.5	100	-
CF5.05.18	18G0.5	100	-
CF5.07.03	3G0.75	200	200
CF5.07.04	4G0.75	200	150
CF5.07.05	5G0.75	200	150
CF5.07.07	7G0.75	200	100
CF5.07.12	12G0.75	100	-
CF5.10.03	3G1.0	200	200
CF5.10.04	4G1.0	200	150
CF5.10.05	5G1.0	200	150
CF5.10.07	7G1.0	150	100
CF5.10.12	12G1.0	100	-
CF5.15.03	3G1.5	200	150
CF5.15.04	4G1.5	200	150
CF5.15.05	5G1.5	200	100
CF5.15.07	7G1.5	150	-
CF5.25.04	4G2.5	150	100
CF5.25.05	5G2.5	100	-
CF6.02.04	(4x0.25)C	200	150
CF6.03.05	(5x0.34)C	200	150
CF6.05.02	(2x0.5)C	200	150
CF6.05.05	(5G0.5)C	200	100
CF6.05.07	(7G0.5)C	150	100
CF6.05.09	(9G0.5)C	100	-
CF6.05.12	(12G0.5)C	100	-
CF6.07.03	(3G0.75)C	200	150
CF6.07.04	(4G0.75)C	200	100
CF6.07.05	(5G0.75)C	200	100

Control cables in the chainflex® CASE

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF6.07.07	(7G0.75)C	150	-
CF6.10.03	(3G1.0)C	200	150
Control cables			
CF6.10.04	(4G1.0)C	200	100
CF6.10.05	(5G1.0)C	150	100
CF6.10.07	(7G1.0)C	100	-
CF6.15.03	(3G1.5)C	200	100
CF6.15.04	(4G1.5)C	150	100
CF6.15.05	(5G1.5)C	150	-
CF6.15.07	(7G1.5)C	100	-
CF6.25.03	(3G2.5)C	150	-
CF6.25.04	(4G2.5)C	100	-
CFSOFT1.02.03	3x0.25	200	200
CFSOFT1.02.08	8x0.25	200	150
CFSOFT1.03.04	4x0.34	200	200
CFSOFT1.05.04	4x0.5	200	150
CFSOFT2.02.03	(3x0.25)C	200	200
CFSOFT2.02.08	(8x0.25)C	200	150
CFSOFT2.03.04	(4x0.34)C	200	200
CFSOFT2.05.04	(4x0.5)C	200	150
CFSOFT2.07.04	(4G0.75)C	200	150
CF890.05.02	2x0.5	200	200
CF890.05.03	3G0.5	200	200
CF890.05.04	4G0.5	200	200
CF890.05.05	5G0.5	200	200
CF890.05.07	7G0.5	200	150
CF890.05.12	12G0.5	150	100
CF890.05.18	18G0.5	100	100
CF890.07.02	2x0.75	200	200
CF890.07.03	3G0.75	200	200
CF890.07.04	4G0.75	200	200
CF890.07.05	5G0.75	200	150
CF890.07.07	7G0.75	200	150
CF890.07.12	12G0.75	150	100
CF890.07.18	18G0.75	100	-
CF890.10.02	2x1.0	200	200
CF890.10.03	3G1.0	200	200
CF890.10.04	4G1.0	200	150
CF890.10.05	5G1.0	200	150
CF890.10.07	7G1.0	150	100
CF890.10.12	12G1.0	100	-
CF890.15.02	2x1.5	200	200

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF890.15.03	3G1.5	200	150
CF890.15.04	4G1.5	200	150
CF890.15.05	5G1.5	150	100
CF890.15.07	7G1.5	100	100
CF890.25.03	3G2.5	200	100
CF890.25.04	4G2.5	150	100
CF890.25.05	5G2.5	100	100
CF891.05.02	(2x0.5)C	200	200
CF891.05.03	(3G0.5)C	200	200
CF891.05.05	(5G0.5)C	200	150
CF891.05.12	(12G0.5)C	150	100
CF891.05.18	(18G0.5)C	100	-
CF891.07.02	(2x0.75)C	200	200
CF891.07.03	(3G0.75)C	200	150
CF891.07.04	(4G0.75)C	200	150
CF891.07.05	(5G0.75)C	200	150
CF891.07.07	(7G0.75)C	150	100
CF891.07.12	(12G0.75)C	100	-
CF891.10.02	(2x1.0)C	200	200
CF891.10.03	(3G1.0)C	200	150
CF891.10.04	(4G1.0)C	200	150
CF891.10.05	(5G1.0)C	200	150
CF891.10.07	(7G1.0)C	150	100
CF891.10.12	(12G1.0)C	100	-
CF891.15.02	(2x1.5)C	200	150
CF891.15.03	(3G1.5)C	200	150
CF891.15.04	(4G1.5)C	150	100
CF891.15.05	(5G1.5)C	100	100
CF891.15.07	(7G1.5)C	100	-
CF891.25.04	(4G2.5)C	100	100
CF891.25.05	(5G2.5)C	100	-
CF77.UL.02.03.INI	3x0.25	200	200
CF77.UL.02.04.D	4x0.25	200	200
CF77.UL.02.05.D	5x0.25	200	200
CF77.UL.02.07.D	7x0.25	200	200
CF77.UL.02.12.D	12x0.25	200	100
CF77.UL.02.18.D	18x0.25	150	-
CF77.UL.02.25.D	25x0.25	100	-
CF77.UL.03.04.INI	4x0.34	200	200
CF77.UL.03.05.INI	5x0.34	200	200
CF77.UL.03.05.INI.D	5x0.34	200	200
CF77.UL.05.04.D	4G0.5	200	200
CF77.UL.05.05.D	5G0.5	200	200

Control cables in the chainflex® CASE

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF77.UL.05.07.D	7G0.5	200	150
CF77.UL.05.12.D	12G0.5	150	100
CF77.UL.05.18.D	18G0.5	100	-
CF77.UL.07.03.D	3G0.75	200	200
CF77.UL.07.04.D	4G0.75	200	150
CF77.UL.07.05.D	5G0.75	200	150
CF77.UL.07.07.D	7G0.75	200	100
CF77.UL.07.12.D	12G0.75	100	-
CF77.UL.10.02.D	2x1.0	200	200
CF77.UL.10.03.D	3G1.0	200	200
CF77.UL.10.04.D	4G1.0	200	150
CF77.UL.10.05.D	5G1.0	200	150
CF77.UL.10.07.D	7G1.0	200	100
CF77.UL.10.12.D	12G1.0	100	-
CF77.UL.15.03.D	3G1.5	200	150
CF77.UL.15.04.D	4G1.5	200	150
CF77.UL.15.05.D	5G1.5	200	150
CF77.UL.15.07.D	7G1.5	150	100
CF77.UL.25.03.D	3G2.5	200	100
CF77.UL.25.04.D	4G2.5	150	100
CF77.UL.25.05.D	5G2.5	150	100
CF77.UL.25.07.D	7G2.5	100	-
CF77.UL.40.04.D	4G4.0	100	-
CF78.UL.05.04	(4G0.5)C	200	150
CF78.UL.05.05	(5G0.5)C	200	150
CF78.UL.05.07	(7G0.5)C	150	100
CF78.UL.05.09	(9G0.5)C	100	-
CF78.UL.05.12	(12G0.5)C	100	-
CF78.UL.07.03	(3G0.75)C	200	150
CF78.UL.07.04	(4G0.75)C	200	100
CF78.UL.07.05	(5G0.75)C	150	100
CF78.UL.07.07	(7G0.75)C	150	-
CF78.UL.10.03	(3G1.0)C	200	100
CF78.UL.10.04	(4G1.0)C	200	100
CF78.UL.10.05	(5G1.0)C	150	100
CF78.UL.10.07	(7G1.0)C	100	-
CF78.UL.15.03	(3G1.5)C	150	100
CF78.UL.15.04	(4G1.5)C	150	100
CF78.UL.15.05	(5G1.5)C	150	100
CF78.UL.15.07	(7G1.5)C	100	-
CF78.UL.25.03	(3G2.5)C	150	100
CF78.UL.25.04	(4G2.5)C	100	-
CF78.UL.25.05	(5G2.5)C	100	-

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF2.01.04	(4x0.14)C	200	200
CF2.01.08	(8x0.14)C	200	150
CF2.01.12	(12x0.14)C	150	100
CF2.01.18	(18x0.14)C	150	-
CF2.01.24	(24x0.14)C	100	-
CF2.02.04	(4x0.25)C	200	150
CF2.02.08	(8x0.25)C	200	150
CF2.02.18	(18x0.25)C	100	-
CF9.02.02	2x0.25	200	200
CF9.02.03.INI	3x0.25	200	200
CF9.02.06	6x0.25	200	200
CF9.02.07	7x0.25	200	200
CF9.02.08	8x0.25	200	200
CF9.02.12	12x0.25	200	150
CF9.02.18	18x0.25	150	100
CF9.02.20	20x0.25	150	100
CF9.02.25	25x0.25	100	-
CF9.03.04.INI	4x0.34	200	200
CF9.03.05.INI	5x0.34	200	200
CF9.03.06	6x0.34	200	200
CF9.03.08	8x0.34	200	150
CF9.03.16.07.03.INI	16x0.34+3x0.75	100	-
CF9.05.02	2x0.5	200	200
CF9.05.03	3x0.5	200	200
CF9.05.04	4x0.5	200	200
CF9.05.05	5x0.5	200	200
CF9.05.07	7x0.5	200	150
CF9.05.12	12x0.5	150	100
CF9.05.18	18x0.5	100	-
CF9.05.25	25x0.5	100	-
CF9.07.04	4G0.75	200	200
CF9.07.05	5G0.75	200	200
CF9.07.07	7G0.75	200	150
CF9.07.12	12G0.75	100	-
CF9.10.03	3G1.0	200	200
CF9.10.04	4G1.0	200	200
CF9.10.05	5G1.0	200	150
CF9.10.12	12G1.0	100	-
CF9.15.02	2x1.5	200	200
CF9.15.04	4G1.5	200	150
CF9.15.05	5G1.5	200	150
CF9.15.07	7G1.5	150	100
CF9.25.04	4G2.5	150	100

Control cables in the chainflex® CASE

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF9.25.05	5G2.5	150	100
CF9.25.07	7G2.5	100	-
CF9.40.04	4G4.0	100	-
Control cables			
CF10.01.12	(12x0.14)C	200	150
CF10.01.18	(18x0.14)C	150	100
CF10.02.04	(4x0.25)C	200	200
CF10.02.08	(8x0.25)C	200	150
CF10.02.12	(12x0.25)C	150	100
CF10.02.25	(25x0.25)C	100	-
CF10.03.05.INI	(5x0.34)C	200	150
CF10.05.04	(4x0.5)C	200	150
CF10.05.05	(5x0.5)C	200	150
CF10.05.07	(7x0.5)C	200	100
CF10.05.12	(12x0.5)C	100	-
CF10.07.04	(4G0.75)C	200	150
CF10.07.05	(5G0.75)C	200	150
CF10.07.07	(7G0.75)C	150	100
CF10.07.12	(12G0.75)C	100	-
CF10.10.02	(2x1.0)C	200	150
CF10.10.03	(3G1.0)C	200	150
CF10.10.04	(4G1.0)C	200	150
CF10.10.05	(5G1.0)C	200	100
CF10.10.07	(7G1.0)C	150	100
CF10.15.04	(4G1.5)C	150	100
CF10.15.05	(5G1.5)C	150	100
CF10.15.07	(7G1.5)C	100	-
CF10.25.04	(4G2.5)C	100	-
CF9.UL.02.02	2x0.25	200	200
CF9.UL.02.03.INI	3x0.25	200	200
CF9.UL.02.04	4x0.25	200	200
CF9.UL.02.06	6x0.25	200	200
CF9.UL.02.08	8x0.25	200	150
CF9.UL.02.12	12x0.25	200	100
CF9.UL.03.04.INI	4x0.34	200	200
CF9.UL.03.05.INI	5x0.34	200	200
CF9.UL.03.06	6x0.34	200	200
CF9.UL.03.08	8x0.34	200	150
CF9.UL.05.02	2x0.5	200	200
CF9.UL.05.03	3x0.5	200	200
CF9.UL.05.04	4x0.5	200	150
CF9.UL.05.05	5x0.5	200	150
CF9.UL.05.07	7x0.5	200	100

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF9.UL.05.12	12x0.5	150	-
CF9.UL.05.18	18x0.5	100	-
CF9.UL.07.05	5G0.75	200	150
CF9.UL.07.07	7G0.75	200	100
CF9.UL.07.12	12G0.75	100	-
CF9.UL.10.03	3G1.0	200	150
CF9.UL.10.04	4G1.0	200	150
CF9.UL.10.12	12G1.0	100	-
CF9.UL.15.04	4G1.5	200	100
CF9.UL.15.05	5G1.5	200	100
CF9.UL.15.07	7G1.5	150	-
CF9.UL.25.04	4G2.5	100	-
CF9.UL.25.05	5G2.5	100	-
CF9.UL.40.04	4G4.0	100	-
CF10.UL.02.04	(4x0.25)C	200	150
CF10.UL.02.08	(8x0.25)C	200	100
CF10.UL.02.12	(12x0.25)C	150	-
CF10.UL.02.25	(25x0.25)C	100	-
CF10.UL.05.04	(4x0.5)C	200	100
CF10.UL.05.05	(5x0.5)C	200	100
CF10.UL.05.12	(12x0.5)C	100	-
CF10.UL.07.04	(4G0.75)C	200	100
CF10.UL.07.05	(5G0.75)C	200	100
CF10.UL.07.07	(7G0.75)C	150	-
CF10.UL.07.12	(12G0.75)C	100	-
CF10.UL.10.02	(2x1.0)C	200	100
CF10.UL.10.03	(3G1.0)C	200	100
CF10.UL.10.04	(4G1.0)C	200	100
CF10.UL.10.05	(5G1.0)C	200	-
CF10.UL.10.07	(7G1.0)C	100	-
CF10.UL.15.04	(4G1.5)C	100	-
CF10.UL.15.05	(5G1.5)C	150	-
CF10.UL.15.07	(7G1.5)C	100	-
CF10.UL.25.04	(4G2.5)C	100	-
CF98.01.02	2x0.14	200	200
CF98.01.03	3x0.14	200	200
CF98.01.04	4x0.14	200	200
CF98.01.08	8x0.14	200	200
CF98.02.03.INI	3x0.25	200	200
CF98.02.04	4x0.25	200	200
CF98.02.07	7x0.25	200	150
CF98.02.08	8x0.25	200	150
CF98.03.04.INI	4x0.34	200	200

Data cables in the chainflex® CASE

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF98.05.04	4x0.5	200	200
CF99.01.02	(2x0.14)C	200	200
CF99.01.04	(4x0.14)C	200	200
CF99.01.04	(4x0.14)C	200	200
CF99.01.08	(8x0.14)C	200	150
CF99.02.04	(4x0.25)C	200	150
CF99.03.08	(8x0.34)C	200	100
Data cables			
CF8821.01.02	(2x0.14)C	200	200
CF8821.01.03	(3x0.14)C	200	200
CF8821.01.04	(4x0.14)C	200	200
CF8821.01.05	(5x0.14)C	200	200
CF8821.01.07	(7x0.14)C	200	200
CF8821.02.02	(2x0.25)C	200	200
CF8821.02.03	(3x0.25)C	200	200
CF8821.02.04	(4x0.25)C	200	200
CF8821.02.05	(5x0.25)C	200	200
CF8821.02.07	(7x0.25)C	200	150
CF240.01.03	(3x0.14)C	200	200
CF240.01.04	(4x0.14)C	200	200
CF240.01.05	(5x0.14)C	200	200
CF240.01.07	(7x0.14)C	200	200
CF240.01.14	(14x0.14)C	200	150
CF240.01.18	(18x0.14)C	200	150
CF240.01.24	(24x0.14)C	200	100
CF240.02.03	(3x0.25)C	200	200
CF240.02.04	(4x0.25)C	200	200
CF240.02.05	(5x0.25)C	200	200
CF240.02.07	(7x0.25)C	200	200
CF240.02.08	(8x0.25)C	200	150
CF240.02.14	(14x0.25)C	200	150
CF240.02.18	(18x0.25)C	200	100
CF240.02.24	(24x0.25)C	150	100
CF240.03.02	(2x0.34)C	200	200
CF240.03.03	(3x0.34)C	200	200
CF240.03.04	(4x0.34)C	200	200
CF240.03.05	(5x0.34)C	200	200
CF240.03.07	(7x0.34)C	200	150
CF240.03.10	(10x0.34)C	200	150
CF240.03.14	(14x0.34)C	200	150
CF240.03.18	(18x0.34)C	150	100
CF240.03.24	(24x0.34)C	100	100
CF240.PUR.01.04	(4x0.14)C	200	200

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF240.PUR.01.07	(7x0.14)C	200	200
CF240.PUR.01.08	(8x0.14)C	200	150
CF240.PUR.01.14	(14x0.14)C	200	150
CF240.PUR.01.18	(18x0.14)C	200	150
CF240.PUR.01.25	(25x0.14)C	150	100
CF240.PUR.02.03	(3x0.25)C	200	200
CF240.PUR.02.04	(4x0.25)C	200	200
CF240.PUR.02.05	(5x0.25)C	200	200
CF240.PUR.02.07	(7x0.25)C	200	150
CF240.PUR.02.08	(8x0.25)C	200	150
CF240.PUR.02.14	(14x0.25)C	200	150
CF240.PUR.02.18	(18x0.25)C	200	100
CF240.PUR.02.25	(25x0.25)C	150	-
CF240.PUR.03.03	(3x0.34)C	200	200
CF240.PUR.03.04	(4x0.34)C	200	200
CF240.PUR.03.05	(5x0.34)C	200	200
CF240.PUR.03.07	(7x0.34)C	200	200
CF240.PUR.03.14	(14x0.34)C	150	150
CF240.PUR.03.18	(18x0.34)C	150	100
CF211.02.01.02	(2x0.25)C	200	200
CF211.02.02.02	(2x(2x0.25))C	200	200
CF211.02.03.02	(3x(2x0.25))C	200	150
CF211.02.04.02	(4x(2x0.25))C	200	150
CF211.02.05.02	(5x(2x0.25))C	200	100
CF211.02.06.02	(6x(2x0.25))C	200	100
CF211.02.08.02	(8x(2x0.25))C	150	-
CF211.02.10.02	(10x(2x0.25))C	100	-
CF211.02.14.02	(14x(2x0.25))C	100	-
CF211.03.03.02	(3x(2x0.34))C	200	150
CF211.03.08.02	(8x(2x0.34))C	100	-
CF211.05.01.02	(2x0.5)C	200	200
CF211.05.02.02	(2x(2x0.5))C	200	100
CF211.05.03.02	(3x(2x0.5))C	200	100
CF211.05.04.02	(4x(2x0.5))C	150	100
CF211.05.05.02	(5x(2x0.5))C	150	-
CF211.05.06.02	(6x(2x0.5))C	100	-
CF211.05.08.02	(8x(2x0.5))C	100	-
CF211.PUR.02.01.02	(2x0.25)C	200	200
CF211.PUR.02.02.02	(2x(2x0.25))C	200	200
CF211.PUR.02.03.02	(3x(2x0.25))C	200	150
CF211.PUR.02.04.02	(4x(2x0.25))C	200	150
CF211.PUR.02.05.02	(5x(2x0.25))C	200	100
CF211.PUR.02.06.02	(6x(2x0.25))C	200	100

Data cables and bus cables
in the chainflex® CASE

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF211.PUR.02.08.02	(8x(2x0.25))C	150	-
CF211.PUR.02.10.02	(10x(2x0.25))C	100	-
CF211.PUR.03.03.02	(3x(2x0.34))C	200	150
Data cables			
CF211.PUR.03.08.02	(8x(2x0.34))C	100	-
CF211.PUR.05.01.02	(2x0.5)C	200	200
CF211.PUR.05.02.02	(2x(2x0.5))C	200	100
CF211.PUR.05.03.02	(3x(2x0.5))C	200	100
CF211.PUR.05.04.02	(4x(2x0.5))C	150	100
CF211.PUR.05.05.02	(5x(2x0.5))C	150	-
CF211.PUR.05.06.02	(6x(2x0.5))C	100	-
CF211.PUR.05.08.02	(8x(2x0.5))C	100	-
CF11.01.04.02	(4x(2x0.14))C	200	150
CF11.01.18.02	(18x(2x0.14))C	100	-
CF11.02.01.02	(2x0.25)C	200	200
CF11.02.02.02	(2x(2x0.25))C	200	200
CF11.02.03.02	(3x(2x0.25))C	200	150
CF11.02.04.02	(4x(2x0.25))C	200	100
CF11.02.05.02	(5x(2x0.25))C	200	100
CF11.02.06.02	(6x(2x0.25))C	150	100
CF11.02.10.02	(10x(2x0.25))C	100	-
CF11.03.08.02	(8x(2x0.34))C	100	-
CF11.05.04.02	(4x(2x0.5))C	150	100
CF11.05.06.02	(6x(2x0.5))C	100	-
CF11.07.03.02	(3x(2x0.75))C	150	-
CF11.10.04.02	(4x(2x1.0))C	100	-
CF112.02.02.02	(2x(2x0.25)C)C	150	100
CF112.02.03.02	(3x(2x0.25)C)C	150	100
CF112.02.04.02	(4x(2x0.25)C)C	100	-
CF112.02.05.02	(5x(2x0.25)C)C	100	-
CF112.05.02.02	(2x(2x0.5)C)C	100	-
CF112.05.04.02	(4x(2x0.5)C)C	100	-
CF12.02.04.02	(4x(2x0.25)C)C	100	-
CF298.01.02	2x0.14	200	200
CF298.01.04	4x0.14	200	200
CF298.01.08	8x0.14	200	150
CF298.02.03	3x0.25	200	200
CF298.02.04	4x0.25	200	200
CF298.02.07	7x0.25	200	150
CF298.02.08	8x0.25	200	150
CF298.03.04	4x0.34	200	200
CF298.03.07	7x0.34	200	150
CF298.05.04	4x0.5	200	200

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF299.01.02	(2x0.14)C	200	200
CF299.01.04	(4x0.14)C	200	200
CF299.01.08	(8x0.14)C	200	100
CF299.02.04	(4x0.25)C	200	150
CF299.02.07	(7x0.25)C	200	100
Coax cables			
CFKoax1.01	1xHF75-0.3/1.6	200	200
CFKoax1.05	5xHF75-0.3/1.6	150	100
CFKoax2.01	1xHF50-0.9/2.95	200	200
CFKoax3.01	1xHF50-0.3/0.84	200	200
Bus cables			
CFBUS.LB.001	(2x0.25)C	200	100
CFBUS.LB.020	(4x0.25)C	200	200
CFBUS.LB.021	(2x0.5)C	200	150
CFBUS.LB.022	(4x0.5)C	200	150
CFBUS.LB.040	(4x0.25)C	200	150
CFBUS.LB.045	(4x(2x0.15))C	200	100
CFBUS.LB.049	(4x(2x0.15))C	200	100
CFBUS.LB.060	(4x0.38)C	200	150
CF888.001	(2x0.25)C	200	150
CF888.021	(2x0.5)C	200	100
CF888.045	(4x(2x0.14))C	200	150
CF888.060	(4x0.34)C	200	150
CFBUS.PVC.001	(2x0.25)C	200	100
CFBUS.PVC.020	(4x0.25)C	200	150
CFBUS.PVC.021	(2x0.5)C	200	100
CFBUS.PVC.022	(4x0.5)C	200	100
CFBUS.PVC.035	(3x0.5)C	200	150
CFBUS.PVC.040	(4x0.25)C	200	200
CFBUS.PVC.045	(4x(2x0.15))C	200	150
CFBUS.PVC.049	(4x(2x0.15))C	200	150
CFBUS.PVC.050	4x(2x0.20)C	150	100
CFBUS.PVC.052	(4x(2x0.15)C)C	150	100
CFBUS.PVC.056	(2x(2x0.15)C +2x0.38)C	200	100
CFBUS.PVC.060	(4x0.38)C	200	150
CFBUS.PVC.068	(2x(2xAWG28) +2x(2xAWG28)C)C	200	150
CF898.001	(2x0.25)C	200	150
CF898.021	(2x0.5)C	200	100
CF898.045	(4x(2x0.14))C	200	150
CF898.060	(4x0.34)C	200	150
CF898.061.FC	(4x0.34)C	200	150

Bus cables and fibre optic cables
in the chainflex® CASE

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CFBUS.PUR.001	(2x0.25)C	200	100
CFBUS.PUR.020	(4x0.25)C	200	150
CFBUS.PUR.021	(2x0.5)C	150	100
CFBUS.PUR.022	(4x0.5)C	200	100
CFBUS.PUR.035	(3x0.5)C	200	150
CFBUS.PUR.040	(4x0.25)C	200	200
CFBUS.PUR.042	(2x0.15)C	200	200
CFBUS.PUR.045	(4x(2x0.15))C	150	150
CFBUS.PUR.049	(4x(2x0.15))C	150	150
CFBUS.PUR.050	4x(2x0.20)C	200	100
CFBUS.PUR.052	(4x(2x0.15)C)C	200	100
CFBUS.PUR.056	(2x(2x0.15)C+2x0.38)C	200	100
CFBUS.PUR.060	(4x0.38)C	200	150
CFBUS.PUR.068	(2x(2xAWG28) +2x(2xAWG28)C)C	200	150
CFBUS.PUR.H01.049	((4x(2x0.15))C+4x1.5)C	200	-
CFBUS.PUR.H01.060	((4x0.38)C+4x1.5)C	150	-
CFBUS.001	(2x0.25)C	100	100
CFBUS.002	(2x0.25)C+4x1.5	100	-
CFBUS.003	(2x0.25)C+3G0.75	200	-
CFBUS.010	(3x(2x0.25))C	100	100
CFBUS.011	(3x(2x0.25)+(3G1.0))C	100	-
CFBUS.020	(4x0.25)C	200	200
CFBUS.021	(2x0.5)C	200	150
CFBUS.022	(4x0.5)C	200	150
CFBUS.030	((2xAWG24)C+2xAWG22)C	150	150
CFBUS.031	((2xAWG18)C+2xAWG15)C	150	-
CFBUS.035	(3xAWG20)C	100	100
CFBUS.040	(4x0.25)C	100	150
CFBUS.045	(4x(2x0.15))C	200	100
CFBUS.049	(4x(2x0.15))C	200	100
CFBUS.050	(4x(2x0.15)C)C	200	-
CFBUS.052	(4x(2x0.15)C)C	200	-
CFBUS.055	2x(2x0.15)C+2x(0.34)C	200	150
CFBUS.060	(4x0.38)C	200	150
CFBUS.065	((2xAWG28)+2xAWG20)C	150	200
CFBUS.066	((2xAWG24)+2xAWG20)C	100	200
CFBUS.070	(4x(2xAWG28)C +(2xAWG28)+3xAWG28)C	100	100
Fibre optic cables			
CFLK.L1.01	1x980/1000	200	200
CFLK.L1.02	2x980/1000	200	150
CFLG88.2.50/125	2x50/125	200	150

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CFLG88.2.62.5/125	2x62.5/125	200	150
CFLG.2LB.PUR.50/125	2x50/125	200	100
CFLG.2LB.PUR.62.5/125	2x62.5/125	200	100
CFLG.4LB.PUR.62.5/125	4x62.5/125	200	100
CFLG.6LB.PUR.50/125	6x50/125	100	-
CFLG.6LB.PUR.62.5/125	6x62.5/125	100	-
CFLG.6LB.PUR.9/125	6x9/125	100	-
CFLG.2LB.200/230	2x200/230	200	100
CFLG.2LB.50/125	2x50/125	200	100
CFLG.2LB.62.5/125	2x62.5/125	200	100
CFLG.4LB.50/125	4x50/125	200	100
CFLG.4LB.62.5/125	4x62.5/125	200	100
CFLG.6LB.50/125	6x50/125	100	-
CFLG.6LB.62.5/125	6x62.5/125	100	-
CFLG.12E.9/125.TC	12x9/125	150	100
CFLG.12G.50/125.TC	12x50/125	150	100
CFLG.12G.62.5/125.TC	12x62.5/125	150	100
CFLG.6G.50/125.TC	6x50/125	150	100
CFLG.6G.62.5/125.TC	6x62.5/125	150	100
Measuring system cables			
CF884.001	(3x(2x0.14)C +(4x0.14)+(2x0.5))C	200	100
CF884.006	(3x(2x0.14)C+(4x0.14) +(4x0.22)+(2x0.5))C	200	100
CF884.009	(4x(2x0.25)+2x0.5)C	200	150
CF884.011	(4x(2x0.34)+4x0.5)C	150	100
CF884.015	(4x(2x0.14)+4x0.5)C	200	100
CF884.022	((2x0.25)+5x0.5)C	200	150
CF884.028	(2x(2x0.15)+(2x0.38))C	200	150
CF211.001	(3x(2x0.14)C +(4x0.14)+(2x0.5))C	200	100
CF211.002	(3x(2x0.14) C+2x(0.5)C)C	150	100
CF211.004	(2x(2x(2x0.14)) +(4x0.14)C+(4x0.5))C	150	100
CF211.006	(3x(2x0.14)C+(4x0.14) +(4x0.25)+(2x0.5))C	150	100
CF211.009	(4x(2x0.25)+2x0.5)C	200	150
CF211.010	(4x(2x0.25)+2x1.0)C	200	100
CF211.011	(4x(2x0.34)+4x0.5)C	200	100
CF211.014	(4x(2x0.25)C+(2x0.5))C	150	-
CF211.015	(4x(2x0.14)+4x0.5)C	200	100
CF211.016	(3x(2x0.25)C)C	200	100

Measuring system cables
in the chainflex® CASE

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF211.017	(4x(2x0.14) +(4x0.14)C+4x1.0)C	150	100
CF211.018	(2x(2x0.25)+2x0.5)C	200	200
Measuring system cables			
CF211.019	(3x(2x0.25)C +(3x0.25)+2x1.0)C	150	100
CF211.022	((2x0.25)+5x0.5)C	200	150
CF211.024	((4x0.14)+2x(2x0.34))C	200	150
CF211.027	(5x(2x0.14)+2x0.5)C	200	150
CF211.028	(2x(2x0.15)+(2x0.38))C	200	150
CF211.032	3x(2x0.14)C+(3x0.14)C	200	150
CF211.033	4x(2x0.14)C+2x(1.0)C	150	100
CF211.036	(5x(2x0.25))C	200	150
CF211.037	(6x(2x0.25))C	200	100
CF211.038	(3x(2x0.14)+(2x0.34))C	200	150
CF211.039	(4x(2x0.14)C+2x(0.5)C)C	150	100
CF894.001	(3x(2x0.14)C +(4x0.14)+(2x0.5))C	200	100
CF894.006	(3x(2x0.14)C+(4x0.14) +(4x0.22)+(2x0.5))C	200	100
CF894.009	(4x(2x0.25)+2x0.5)C	200	150
CF894.011	(4x(2x0.34)+4x0.5)C	150	100
CF894.015	(4x(2x0.14)+4x0.5)C	200	100
CF894.022	((2x0.25)+5x0.5)C	200	150
CF894.028	(2x(2x0.15)+(2x0.38))C	200	150
CF111.001.D	(3x(2x0.14)C +(4x0.14)+(2x0.5))C	200	100
CF111.002.D	(3x(2x0.14)C+2x(0.5)C)C	150	100
CF111.004.D	(2x(2x(2x0.14)) +(4x0.14)C+(4x0.5))C	150	-
CF111.006.D	(3x(2x0.14)C+(4x0.14) +(4x0.25)+(2x0.5))C	150	100
CF111.009.D	(4x(2x0.25)+2x0.5)C	200	150
CF111.010.D	(4x(2x0.25)+2x1.0)C	200	100
CF111.011.D	(4x(2x0.34)+4x0.5)C	200	100
CF111.014.D	(4x(2x0.25)C+(2x0.5))C	150	-
CF111.015.D	(4x(2x0.14)+4x0.5)C	200	100
CF111.020.D	(3x(2x0.14) +2x(4x0.14)+(2x0.5))C	200	100
CF111.021.D	((4x0.25) +3x(2x0.25+2x0.5))C	150	100
CF111.022.D	((2x0.25)+5x0.5)C	200	150
CF111.024.D	((4x0.14)+2x(2x0.34))C	200	150

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF111.026.D	(6x(2x0.25) +(2x0.34)C+(2x0.5))C	150	-
CF111.027.D	(5x(2x0.14)+2x0.5)C	200	150
CF111.028.D	(2x(2x0.15)+(2x0.38))C	200	150
CF111.032.D	3x(2x0.14)C+(3x0.14)C	200	100
CF111.040.D	(3x(4x0.14) +(2x0.14+2x0.34)+2x1.5)C	200	100
CF113.001.D	(3x(2x0.14)C +(4x0.14)+(2x0.5))C	150	100
CF113.002.D	(3x(2x0.14)C+2x(0.5)C)C	100	100
CF113.003.D	(3x(2x0.14)+2x1.0)C	200	150
CF113.004.D	(2x(2x(2x0.14)) +(4x0.14)C+(4x0.5))C	100	-
CF113.005.D	(4x(2x0.14)+4x0.5)C	150	100
CF113.006.D	(3x(2x0.14)C+(4x0.14) +(4x0.25)+(2x0.5))C	100	-
CF113.007.D	(4x0.34)C	200	200
CF113.008.D	(3x(2x0.25))C	200	150
CF113.009.D	(4x(2x0.25)+2x0.5)C	150	100
CF113.010.D	(4x(2x0.25)+2x1.0)C	150	100
CF113.011.D	(4x(2x0.34)+4x0.5)C	100	100
CF113.013.D	(3x(2x0.14)C+2x0.5)C	150	100
CF113.014.D	(4x(2x0.25)C+(2x0.5))C	100	-
CF113.015.D	(4x(2x0.14)+4x0.5)C	150	100
CF113.016.D	(3x(2x0.25)C)C	150	100
CF113.017.D	(4x(2x0.14) +(4x0.14)C+4x1.0)C	100	100
CF113.018.D	(2x(2x0.25)+2x0.5)C	200	200
CF113.019.D	(3x(2x0.25)C +(3x0.25)+2x1.0)C	100	100
CF113.022.D	((2x0.25)+5x0.5)C	200	150
CF113.025.D	(3x(2x0.14)C+(2x0.5)C)C	100	100
CF113.027.D	(5x(2x0.14)+2x0.5)C	200	100
CF113.028.D	(2x(2x0.20)+(2x0.38))C	200	150
CF113.029.D	(5x(2x0.25)C +(2x0.25+2x0.5))C	100	-
CF113.031.D	(2x(2x0.25)C+2x1.0)C	150	100
CF113.032.D	3x(2x0.14)C+(3x0.14)C	150	100
CF113.033.D	4x(2x0.14)C+2x(1.0)C	100	100
CF113.036.D	(5x(2x0.25))C	150	100
CF113.037.D	(6x(2x0.25))C	150	100
CF113.038.D	(3x(2x0.14)+(2x0.34))C	200	100

Measurement system and servo cables
in the chainflex® CASE

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF113.040.D	(3x(4x0.14) +(2x0.14+2x0.34)+2x1.5)C	150	100
CF11.001.D	(3x(2x0.14) C+(4x0.14)+(2x0.5))C	150	100
CF11.002.D	(3x(2x0.14)C+2x(0.5)C)C	150	100
CF11.003.D	(3x(2x0.14)+2x1.0)C	200	150
CF11.004.D	(2x(2x(2x0.14)) +(4x0.14)C+(4x0.5))C	100	-
CF11.005.D	(4x(2x0.14)+4x0.5)C	150	100
CF11.006.D	(3x(2x0.14)C+(4x0.14) +(4x0.25)+(2x0.5))C	100	-
CF11.007.D	(4x0.34)C	200	200
CF11.008.D	(3x(2x0.25))C	200	150
CF11.009.D	(4x(2x0.25)+2x0.5)C	150	100
CF11.010.D	(4x(2x0.25)+2x1.0)C	150	100
CF11.011.D	(4x(2x0.34)+4x0.5)C	100	100
CF11.012.D	(3x(2x0.14)C+(3x0.14) C +(4x0.14) +(2x0.14+2x0.5))C	100	-
CF11.013.D	(3x(2x0.14)C+2x0.5)C	150	100
CF11.014.D	(4x(2x0.25)C+(2x0.5))C	100	-
CF11.015.D	(4x(2x0.14)+4x0.5)C	200	100
CF11.016.D	(3x(2x0.25)C)C	150	100
CF11.017.D	(4x(2x0.14) +(4x0.14)C+4x1.0)C	100	100
CF11.018.D	(2x(2x0.25)+2x0.5)C	200	200
CF11.019.D	(3x(2x0.25)C +(3x0.25)+2x1.0)C	100	100
CF11.021.D	((4x0.25) +3x(2x0.25+2x0.5))C	100	100
CF11.022.D	((2x0.25)+5x0.5)C	200	150
CF11.025.D	(3x(2x0.14)C+(2x0.5)C)C	150	100
CF11.027.D	(5x(2x0.14)+2x0.5)C	200	100
CF11.028.D	(2x(2x0.20)+(2x0.38))C	200	150
CF11.031.D	(2x(2x0.25)C+2x1.0)C	150	100
CF11.032.D	3x(2x0.14)C+(3x0.14)C	150	150
CF11.033.D	4x(2x0.14)C+2x(1.0)C	100	100
CF11.034.D	3x(2x0.14)C+(4x0.14)C +2x(2x0.5)C	100	-

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF11.035.D	(4x(2x0.25)C+2x(2x0.5))C	100	-
CF11.038.D	(3x(2x0.14)+(2x0.34))C	200	150
CF11.040.D	(3x(4x0.14) +(2x0.14+2x0.34)+2x1.5)C	150	100
Servo cables			
CF887.07.05.02.01	(4G0.75+(2x0.5)C)C	150	100
CF887.10.07.02.02	(4G1.0+2x(2x0.75)C)C	100	-
CF887.15.15.02.01	(4G1.5+(2x1.5)C)C	100	-
CF210.UL.15.15.02.01	(4G1.5+(2x1.5)C)C	100	-
CF21.07.03.02.02.UL	(4G0.75+2x(2x0.34)C)C	100	-
CF21.07.05.02.01.UL	(4G0.75+(2x0.5)C)C	100	-
CF21.15.15.02.01.UL	(4G1.5+(2x1.5)C)C	100	-
CF897.15.15.02.01	(4G1.5+(2x1.5)C)C	100	-
CF270.UL.07.03.02.02.D	(4G0.75+2x(2x0.34)C)C	100	-
CF270.UL.10.07.02.02.D	(4G1.0+2x(2x0.75)C)C	100	-
CF270.UL.15.15.02.01.D	(4G1.5+(2x1.5)C)C	100	-
CF27.07.03.02.02.D	(4G0.75+2x(2x0.34)C)C	100	-
CF27.07.05.02.01.D	(4G0.75+(2x0.5)C)C	100	-
CF27.15.05.04.D	(4G1.5+(4x0.5)C)C	100	-
CF27.15.15.02.01.D	(4G1.5+(2x1.5)C)C	100	-
CF29.15.15.02.01.D	(4G1.5+(2x1.5)C)C	100	-
Hybrid Servo cables			
CF220.UL.H100.07.04	(4G0.75+(2x0.34)C +(2xAWG22)C)C	100	-
CF220.UL.H101.10.04	(4G1.0+(2x0.75)C +(2xAWG22)C)C	100	-
CF280. UL.H100.07.04.D	(4G0.75+(2x0.34)C +(2xAWG22)C)C	100	-
CF280. UL.H101.10.04.D	(4G1.0+(2x0.75)C +(2xAWG22)C)C	100	-
CF280.UL.H203.15.04.D	(4G1.5+(3x1.0)C)C	100	-
CF280. UL.H300.03.04.D	(4G0.34+(2x0.34)C +(4xAWG26)C)C	150	100
CF280. UL.H301.07.04.D	(4G0.75+(2x0.5)C +(4xAWG26)C)C	100	-
CF280. UL.H304.15.04.D	(4G1.5+(2x1.5)C +(4xAWG26)C)C	100	-
Motor cables			
CF885.15.04	4G1.5	200	150
CF885.25.04	4G2.5	150	100
CF885.40.04	4G4.0	100	-

Motor and spindle cables
in the chainflex® CASE

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF886.15.04	(4G1.5)C	150	100
CF886.25.04	(4G2.5)C	100	-
CF886.40.04	(4G4.0)C	100	-
CF210.UL.05.04	(4G0.5)C	200	150
Motor cables			
CF210.UL.15.04	(4G1.5)C	150	100
CF210.UL.25.04	(4G2.5)C	100	-
CF30.15.04	4G1.5	200	150
CF30.25.04	4G2.5	150	100
CF30.25.05	5G2.5	100	-
CF30.40.04	4G4.0	100	-
CF31.15.04	(4G1.5)C	150	100
CF31.25.04	(4G2.5)C	100	-
CF895.15.04	4G1.5	200	150
CF895.25.04	4G2.5	150	100
CF895.40.04	4G4.0	100	-
CF896.07.04	(4G0.75)C	200	150
CF896.15.04	(4G1.5)C	200	100
CF896.25.04	(4G2.5)C	150	-
CF896.40.04	(4G4.0)C	100	-
CF270.UL.07.04.D	(4G0.75)C	200	150
CF270.UL.15.04.D	(4G1.5)C	150	100
CF270.UL.25.04.D	(4G2.5)C	100	-
CF270.UL.10.06.D	(6G1.0)C	150	100
CF27.07.04.D	(4G0.75)C	200	100
CF27.15.04.D	(4G1.5)C	150	-
CF27.25.04.D	(4G2.5)C	100	-
CF34.UL.15.04.D	4G1.5	200	150
CF34.UL.25.04.D	4G2.5	150	100
CF34.UL.40.04.D	4G4.0	100	-
CF35.UL.05.04	(4G0.5)C	200	150
CF35.UL.07.04	(4G0.75)C	200	150
CF35.UL.15.04	(4G1.5)C	150	100
CF35.UL.25.04	(4G2.5)C	100	-
CF37.15.04.D	4G1.5	200	150
CF37.25.04.D	4G2.5	150	100
CF37.40.04.D	4G4.0	100	-
CF38.15.04	(4G1.5)C	150	100
CF38.25.04	(4G2.5)C	100	-
Spindle cables/Single cores			
CF885.40.01	1x4.0	200	150
CF885.60.01	1x6.0	200	150

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CF885.100.01	1x10	150	100
CF885.160.01	1x16	100	-
CF885.PE.25.01	1G2.5	200	200
CF885.PE.40.01	1G4.0	200	150
CF885.PE.60.01	1G6.0	200	150
CF885.PE.100.01	1G10	150	100
CF885.PE.160.01	1G16	100	-
CF886.160.01	(1x16)C	100	-
CF270.UL.60.01.D	(1x6.0)C	200	150
CF270.UL.160.01.D	(1x16)C	100	100
CF300.UL.40.01.D	1x4.0	200	200
CF300.UL.60.01.D	1x6.0	200	150
CF300.UL.100.01.D	1x10	200	150
CF300.UL.160.01.D	1x16	100	100
CFPE.15.01	1G1.5	200	200
CFPE.25.01	1G2.5	200	200
CFPE.40.01	1G4.0	200	200
CFPE.60.01	1G6.0	200	150
CFPE.100.01	1G10	200	150
CFPE.160.01	1G16	100	100
CF310.UL.25.01	(1x2.5)C	200	200
CF310.UL.40.01	(1x4.0)C	200	200
CF310.UL.60.01	(1x6.0)C	200	150
CF310.UL.100.01	(1x10)C	150	100
CF310.UL.160.01	(1x16)C	100	100
CF330.60.01.D	1x6.0	200	150
CF330.100.01.D	1x10	200	150
CF330.160.01.D	1x16	150	100
CF340.40.01	(1x4.0)C	200	200
CF340.160.01	(1x16)C	100	100
Torsion cables			
CFROBOT2.07.04.C	(4G0.75)C	200	150
CFROBOT2.07.05.C	(5G0.75)C	200	100

Torsion cables & pneumatic hoses
in the chainflex® CASE

Part No.	Number of cores and conductor nominal cross section [mm²]	Max. length [m] CASE M	Max. length [m] CASE S
CFROBOT2.07.07.C	(7G0.75)C	150	100
CFROBOT3.02.03.02	(3x(2x0.25))C	150	100
CFROBOT3.02.04.02	(4x(2x0.25))C	150	-
CFROBOT3.02.06.02	(6x(2x0.25))C	100	-
CFROBOT3.05.05.02	(5x(2x0.5))C	100	-
CFROBOT4.001	(3x(2x0.14)C +(4x0.14)+(2x0.5))C	150	-
CFROBOT4.006	(3x(2x0.14)C+(4x0.14) +(4x0.22)+(2x0.5))C	100	-
CFROBOT4.009	(4x(2x0.25)+(2x0.5))C	150	100
CFROBOT4.015	(4x(2x0.14)+4x0.5)C	200	100
CFROBOT4.028	(2x(2x0.20)+(2x0.38))C	200	150
CFROBOT5.500	2x62.5/125	200	100
CFROBOT5.501	2x50/125	200	100
CFROBOT7.07.03.02.02.C	(4G0.75+2x(2x0.34)C)C	100	-
CFROBOT7.15.03.C	(3G1.5)C	200	100
CFROBOT7.15.04.C	(4G1.5)C	200	100
CFROBOT7.25.03.C	(3G2.5)C	150	100
CFROBOT7.25.04.C	(4G2.5)C	150	-
CFROBOT.035	(1x10)C	100	-
CFROBOT8.PLUS.001	(2x0.25)C	200	100
CFROBOT8.PLUS.045	(4x(2x0.15))C	200	150
CFROBOT8.PLUS.060	(4x0.34)C	200	150
CFROBOT8.001	(2x0.35)C	200	150
CFROBOT8.022	(4x0.5)C	200	150
CFROBOT8.030	(2xAWG24)C +(2xAWG22)C	150	100
CFROBOT8.045	4x(2x0.15)C	150	100
CFROBOT8.049	4x(2x0.15)C	150	100
CFROBOT8.050	4x(2x0.15)C	150	-
CFROBOT8.052	4x(2x0.15)C	150	-
CFROBOT8.060	(2x(2x0.34))C	200	100
CFROBOT9.001	5G1.0+(2x1.0)C	150	100
CFROBOT9.010	(4x(2x0.25)C)C	150	-
Pneumatic hoses			
CAPE.A.06.0	4.0x1.0x6.0	200	-
CAPE.A.08.0	5.7x1.15x8.0	200	-
CAPU.A.06.0	4x1.0x6.0	200	-
CAPU.A.08.0	5.7x1.15x8.0	200	-

chainflex® in the laboratory - the largest test lab for moving cables in the world

3,800m² test laboratory with over 65 test stations, two climatic containers (40 feet each) and 200m of outdoor testing facilities ...

+

2 billion test strokes every year

250 million cycles in batch testing per year

Qualified laboratory & monitoring of manufacturing with UL ...
... certified chainflex® guarantee promise ...

up to 36 month guarantee

Notes

/9001:2015 /16949:2016

igus® is certified in accordance with ISO 9001:2015 and ISO/TS 16949:2016 in energy supply systems, cables, harnessing, and plastic plain bearings.

/14001:2015

igus® is certified according to ISO 14001:2015. This recognised basis for environmental management systems supports us as we become a CO2-neutral factory.

/newsletter

Get more information about motion plastics® innovations and trends: exciting applications, videos, test results, online seminars and much more.
Compact and free of charge. Register now at
www.igus.eu/newsletter

/online

Find out more about chainflex® CASE at
www.igus.eu/cfcase

chainflex® CASE

igus® GmbH
Spicher Str. 1a
51147 Cologne
Phone +49 2203 9649-0
www.igus.eu

© igus® GmbH, Germany
MAT0075095.20 as of 07/2022
Subject to technical changes.

© 2022 igus® GmbH