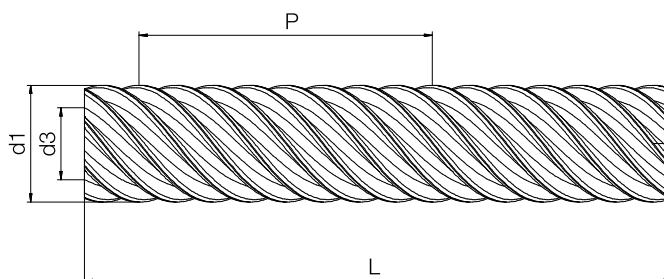


dryspin® lead screw technology**New dryspin® dimensions DS6.35x25.4 LH and DS32x5 RH: expansion of the product range****Save costs with lead screw systems**

All dryspin® lead screws can be custom-machined. Configure online or send us your drawing. We can quickly provide you with a quotation. The new DS32x5 is used in particular in our new SLR linear axis.

Our advantages:

- Quiet due to thread geometry, longer service life
- Up to 30% longer service life
- Ongoing test program in the in-house test laboratory
igus.eu/dryspin-testreports
- Lubrication-free operation and clean
- Free online tool for lead screw machining without previous CAD knowledge, including 2D dimension drawing and live price igus.eu/dsk

Product range

Part No.	Thread	d1 -0.1 [mm]	d3 -0.1 [mm]	P	L Max. [mm]	Weight [kg]	Number of gears	Pitch angle [°]
DST-LS-32X5-R-ES	DS32x5	32	27.6	5	3,000	5.40	1	2.85
DST-LS-6.35X25.4-L-ES	DS6.35x25.4	6.35	4.1	25.4	1,000	0.17	8	51.85

More information

Discover more
motion plastics®
in the online shop



Sample box order



Service life calculator



3D CAD



Configurator