



dryspin® lead screw technology**dryspin® injection-moulded cylindrical lead screw nuts with machined thread****Injection-moulded lead screw nuts**


The new dryspin® injection moulding lead screw nuts in cylindrical design, with flange or with spanner flat, ensure quiet operation due to tighter manufacturing tolerances and rounded tooth geometries. No grease or oil in the lead screw drive.

- **Cost-effective production in injection moulding**
- **Up to 25% less wear compared to POM+PTFE**
igus.eu/dryspin-testreports
- **Online calculation tool for service life** igus.eu/dge

Product range

Part No.	Thread d1 x P	d1 [mm]	d2 [mm]	b1 [mm]	A [mm]
DST-□SLM-C-01-DS20X5	DS20x5	20	32	40	29
DST-□SLM-C-01-DS20X10	DS20x10	20	32	40	29

□ = Information about other materials and dimensions available online - igus.eu/leadscrew

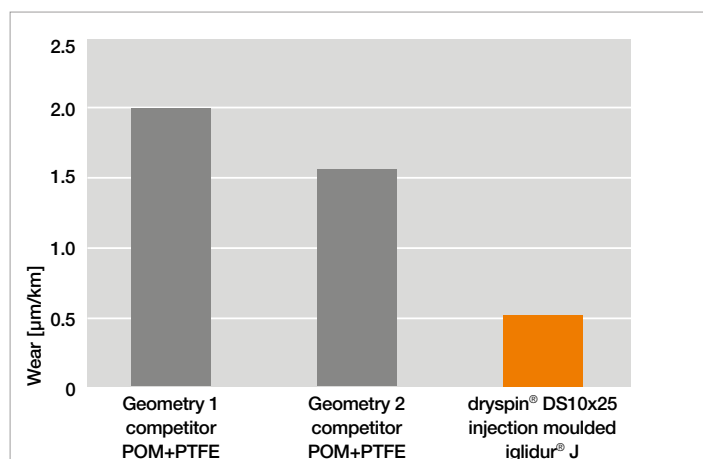

Wear after 630,000 cycles, 140mm stroke,
100rpm, 200N load, no lubrication