

# drylin® NT telescopic rail

## Pre-loaded and quiet





### With spring pre-load

The new generation of telescopic rails NT-35-P with pretension and smooth operation.

- Consistent telescopic rail due to spring pretensioning mechanism
- Extensions lengths accurate to the millimetre up to 600mm
- Load capacity of a drawer with two vertically installed systems, 450mm extension, load capacity 50N
- No external lubrication

### Product range

| Part No.   | b    | H    | C4   | C5 = C6 |      | L    |      |
|------------|------|------|------|---------|------|------|------|
|            |      |      |      | min.    | max. | min. | max. |
|            | [mm] | [mm] | [mm] | [mm]    | [mm] | [mm] | [mm] |
| NT-35-P    | 35   | 19   | 60   | 20      | 49.5 | 140  | 600  |
| NT-35-P-AR | 35   | 19   | 60   | 20      | 49.5 | 140  | 600  |

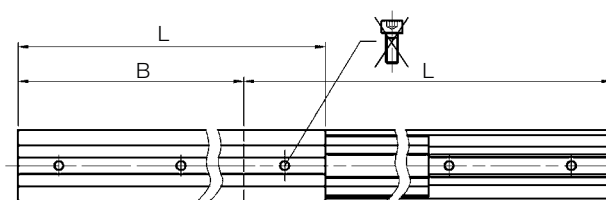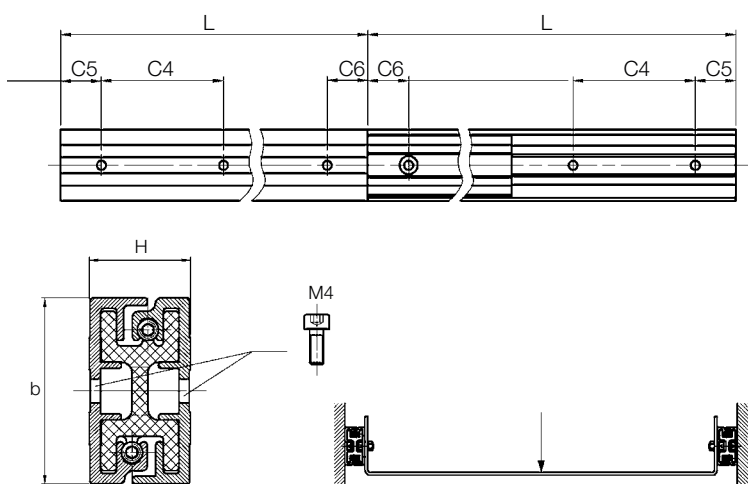

Partial extension NT-35-"L"-"B"